

# Front roller

Front-Cutter (Cutting disc roller)  
Front-ring roller



*Cutting and crumbling  
for a good seedbed  
preparation.*

**Regent**

# Front-Cutter

Cutting and crumbling for a good seedbed preparation.



## Front-Cutter

- Discs elements in two rows care for a good crushing effect.
- Through the wave profile of the discs a good levelling can be achieved.
- F-WW (2-rowed wave clumb disc)  
F-SW (1. row cutting disc, 2. row wave clumb disc)
- The interlocking discs avoid blockages.
- Front baulk with spring tines or front knife tine section arrange for an optimal soil cultivation also at heavy soils.
- Optionally: Front hitch with fast mounting triangle.
- Front-Cutter Type „T“
- A 2-part tube roller serves as depth guidance.
- They can be adjusted infinitely via a spindle.
- A considerably advantage is that the depth guidance can be used as an additional re-solidification.



Front-Cutter WW with spring tines



Front-Cutter WW „T“ with tube roller serves and front knife tine



Front-Cutter SW with row wave clumb disc and row cutting disc front

# Front-ring-roller

## Front ring roller

- Good crushing effect through the wipe baulk which is adjustable between the rings.
- Big dimensioned ring profiles (610 mm) enable an optimal re-compression and a blockage-free working also at different types of soils
- Different front tools enable optimal cultivation.(front baulk with spring tines – 2-rowed, front knife tine section or Vibro front plate spring section)
- For extreme assignment the front packer can be equipped with additional weights.
- Optionally: Front hitch with fast mounting triangle.



Front ring roller with spring tines



Multifunctional utilisation of the front ring roller as after run tool for the cultivator Tukan




Front ring roller with front knife tine

...as a lot of organic residue no obstacle.



# NEW

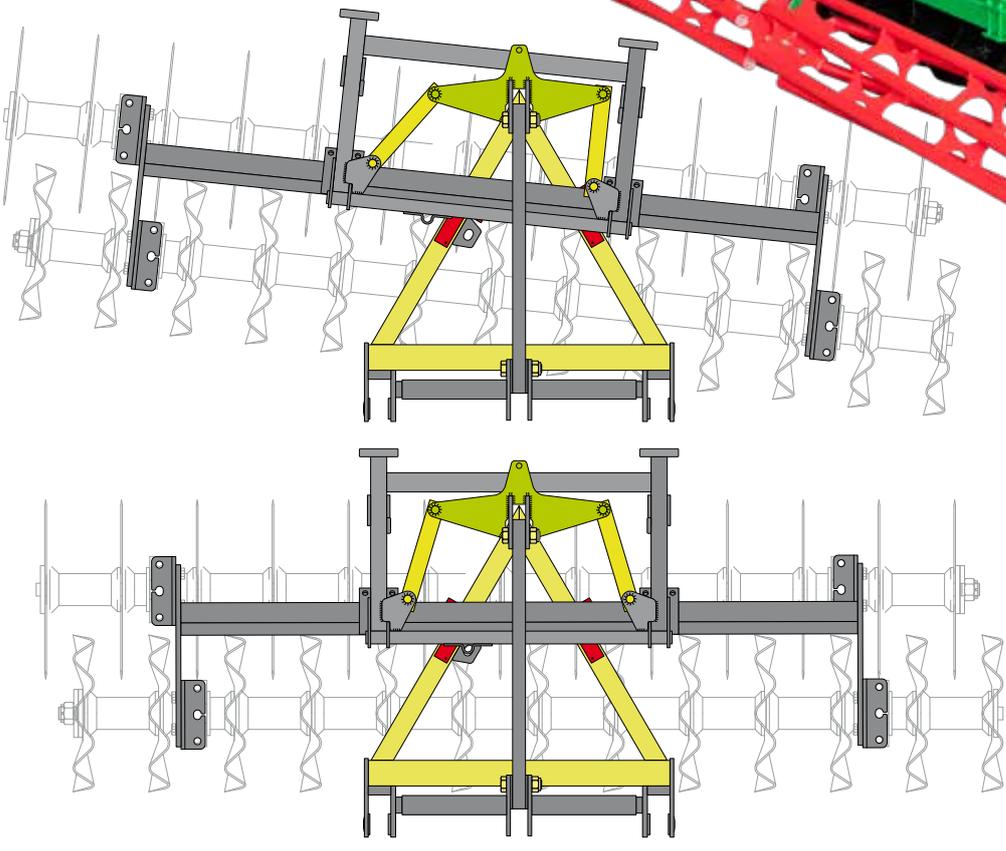

Through the trapezium guide the rollers are directed automatically into the direction of motion.

- easily guidable
- fuel saving
- low-wear

## For every use the right roller!

Front-Cutter	Working width cm	Transport width cm	guideable	Discs / rollers ø mm	Weight kg			
					Without front tool	With front bauik with spring tines	With front knife tine section	With Vibro front plate spring section
F-WW 300	300	300	✓	500	770	880	870	910
F-SW 300	300	300	✓	560 / 500	770	880	870	910
F-WW T 300	300	300	✓	500	900	1030	1020	1060
F-SW T 300	300	300	✓	560 / 500	900	1030	1020	1060
<b>Front- RW</b>								
FL-RW 250	250	250	✓	610	470	540	530	560
FL-RW 300	300	300	✓	610	530	640	630	670



Sales partner



Regent Pflugfabrik GmbH  
Bahnhofstr. 105  
4800 Attnang-Puchheim



Tel. +43 7674 62661  
Fax. +43 7674 62207  
info@regent.at

Subject to technical changes and misprint.  
5846/1015-En 6616